


# CAHP-HI-38



# TECHNICAL SPECIFICATIONS

- Direct heating (one-time heating) + circulate heating
- 380V/3Ph/50Hz
- Direct heating (The ambient dry/wet bulb temperature: 20°C/15°C, The initial water temperature is 15°C and the termination temperature of water is 55°C)
  - Power input: 9.76kW
  - Rated current: 17.6A
  - Heating capacity: 42kW
  - Water production capacity: 0.902m<sup>3</sup>/h
  - COP: 4.3
  - The highest water temperature: 60°C
- Circulate heating (The ambient dry/wet bulb temperature: 20°C/15°C, water temp: 47°C -52°C ) :
  - Power input: 10.3kW
  - Heating capacity: 38kW
  - COP: 3.7
  - The rated water flow: 6.5m<sup>3</sup>/h
- Refrigerant: R410A /6.2kg
- Noise: 65dB (A)
- Applicable ambient temperature: -10°C~48°C
- Dimensions: 1020mm x 846mm x 1840mm

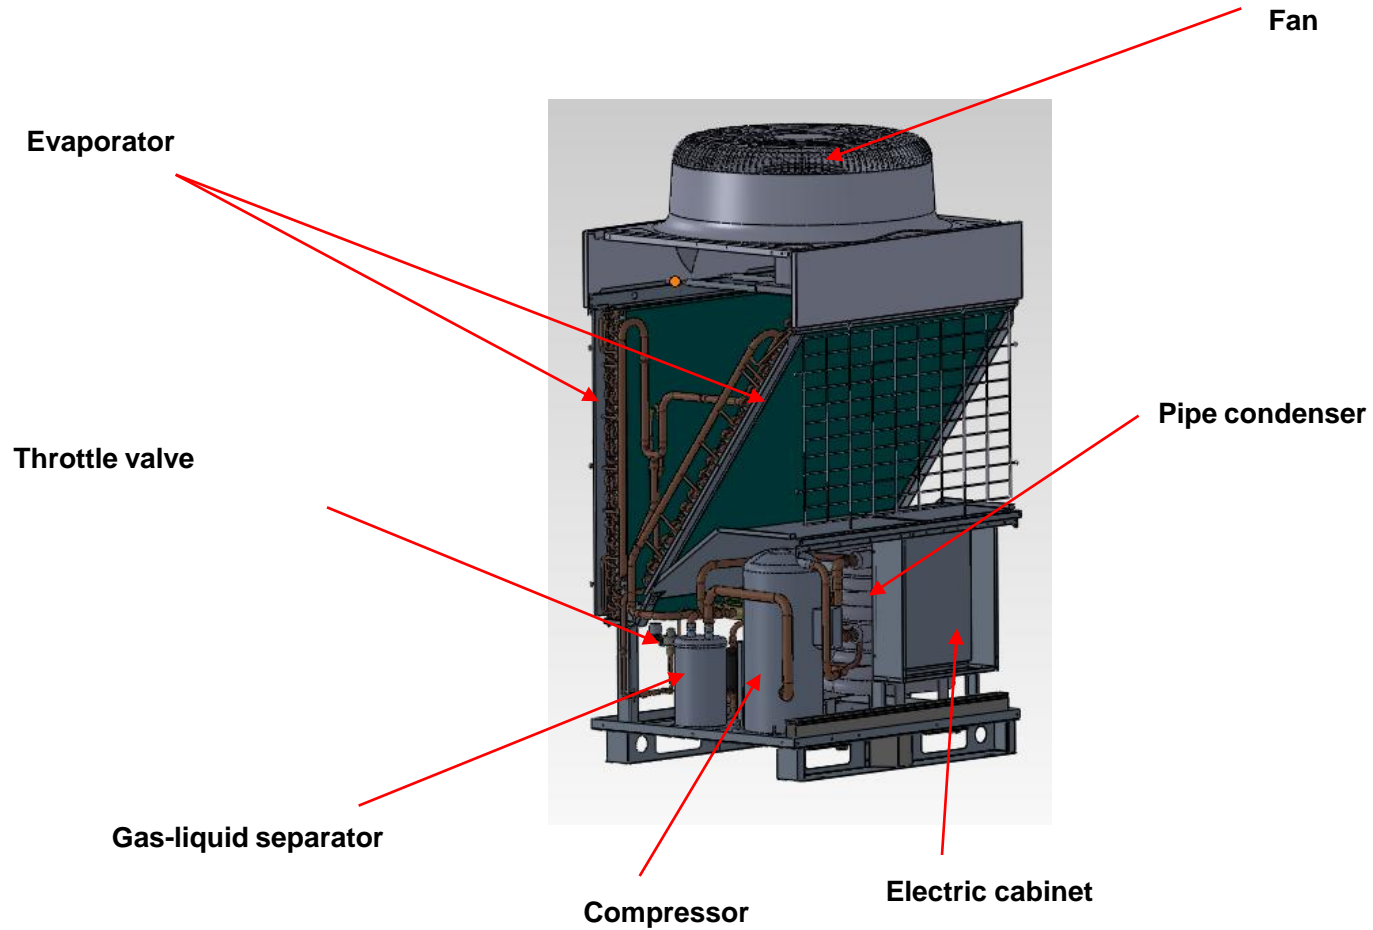