



# T 7 Ǻ Ǻ V Ǻ Ǻ Ǻ P Ǻ Ǻ Ǻ P Ǻ PHUONG LINH DUST COLLECTOR

Model : SDC-PL-12




E"VT PI "U P"RJ O

-{ "k"m k'o a { "j Ǻv'd k' e"u p'zw v't e"k r "v k'e1/pi  
v{ "RJ PI "N P J ".u p'rj o " e" a pj "i k "k"o v  
v tqpi 'pj pi "u p'rj o "ej v'n pi "ecq."o w'o -" r0  
O a { "j Ǻv'd k' e"y k v'm "j q<p"v q<p"y w p'n k'ej q'xk e  
y a q'n r."d q'f pi "x<<"x "ukpj  
O a { " e" pi "f pi " "j Ǻv'd k't qpi "e a e"pj <"o a { ."e a e  
x "v t "rj a v ukpj "d k "N q k'o a { "p<<"e" w" k o " "d p  
t v'ecq'rj Ǻj r"x kpj pi "o 1/k't pi "nj e"pi j k v

} \* Ǻ Ǻ ] Ǻ Ǻ f } \* Ǻ \* @ Ǻ @ } \* Ǻ } @ Ǻ @ } \* Ǻ Ǻ ~ Ǻ Ǻ @ } \* Ǻ Ǻ @

Model : SDC-PL-12

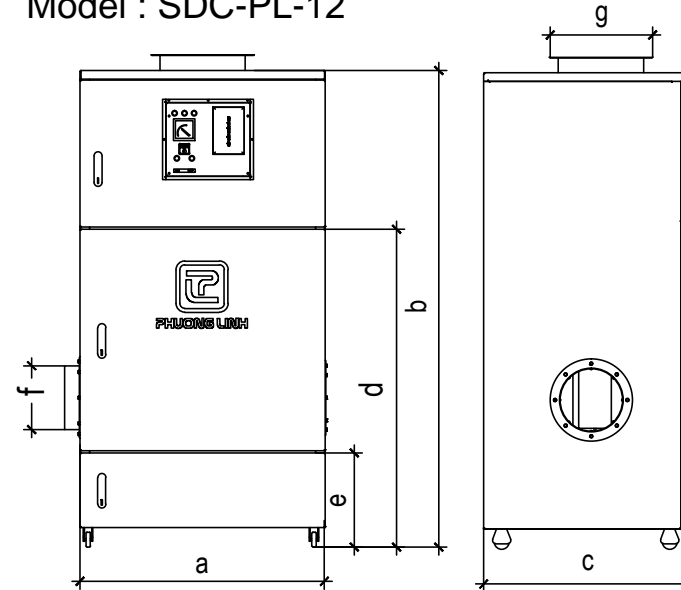

M EJ "VJ E"E "D P

MODEL NO.	Kích Thước Chi Tiết ( mm)						
	a	b	c	d	e	f	g
SDC-PL-12	900	2000	900	1400	400	Ø250	350

VJ ~ PI "U "M "VJ W V

MODEL NO.	Process flow (m <sup>3</sup> /mjn)	Filtering Area m <sup>2</sup>	Filtering Velocity m / min	Static pressure ( mmAq )	Motor Kw ( HP)	Number of filter	Outlet Duct(Ø) ( mm )
Min. ~ Max							
SDC-PL-12	40~60	22.5	1.0~2.0	200~300	3.7(4.8)	12	300