



## T 7 Y ̃ A ̃ V ̃ A ̃ O ̃ A ̃ P ̃ P ̃ O ̃ S ̃ O ̃ P ̃ A ̃ PHUONG LINH DUST COLLECTOR

Model : SDC-PL- 4




### E"VT PI 'U P'RJ O

~{ 'h' m K' o { 'j ̃ A' d K' e' u p' z w v' t e' k r' v k e' / p i  
v' 'RJ PI 'N P J ' . ' u p' r j o " e" a p j ' i k' h' k' o v  
v t q p i ' p j pi ' u p' r j o ' e j v h pi ' e c q . ' o w' o ~ " r 0  
O a { 'j ̃ A' d K' e' v j k v m ' j q < p ' v q < p ' j w p' h k e j q' x k e  
j y a q' h r . ' d q' f pi ' x < x ' u l p j  
O a { " e" pi ' f pi " ' j ̃ A' d K' v t q p i ' e a e' p j « ' o a { . ' e a e  
x ' v ' r j a v u l p j ' d K' O N q K' o a { ' p < { ' e » " w' k o " ' d p  
t v' e c q' r j A' j r' x k p j pi ' b o ' k' v pi ' n j e' p i j k v

} \* ̃ A ̃ ] ̃ O f } \* ̃ A ̃ \* @ ̃ A ̃ @ } \* ̃ A ̃ } @ ̃ V @ } \* ̃ A ̃ a ̃ ̃ A ̃ @ } \* ̃ A ̃ a ̃ @

Model : SDC-PL-4

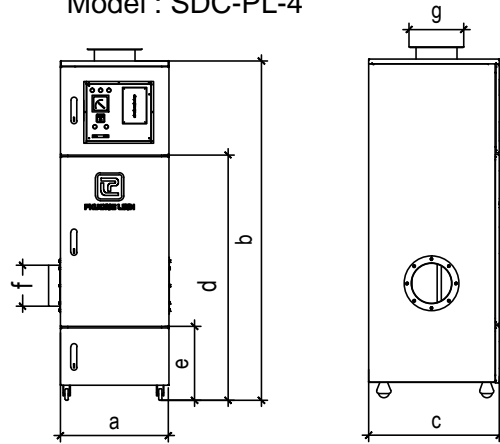

### MEJ 'VJ E'E 'D P

MODEL NO.	Kích Thước Chi Tiết ( mm )						
	a	b	c	d	e	f	g
SDC-PL-4	700	1750	700	1350	350	Ø150	250

### VJ ~ PI 'U 'M 'VJ W V

MODEL NO.	Process flow ( m <sup>3</sup> / m j n )	Filtering Area m <sup>2</sup>	Filtering Velocity m / min	Static pressure ( mm A q )	Motor Kw ( HP )	Number of filter	Outlet Duct ( Ø ) ( mm )
	Min. ~ Max						
SDC-PL-4	9~16	8	1.0~2.0	200~300	1.1(1.5)	4	200



## T 7 Y ̃ A ̃ V ̃ A ̃ O ̃ A ̃ P ̃ P ̃ O ̃ S ̃ O ̃ P ̃ A ̃ PHUONG LINH DUST COLLECTOR

Model : SDC-PL-6




### E"VT PI 'U P'RJ O

~{ 'h' m K' o { 'j ̃ A' d K' e' u p' z w v' t e' k r' v k e' / p i  
v' 'RJ PI 'N P J ' . ' u p' r j o " e" a p j ' i k' h' k' o v  
v t q p i ' p j pi ' u p' r j o ' e j v h pi ' e c q . ' o w' o ~ " r 0  
O a { 'j ̃ A' d K' e' v j k v m ' j q < p ' v q < p ' j w p' h k e j q' x k e  
j y a q' h r . ' d q' f pi ' x < x ' u l p j  
O a { " e" pi ' f pi " ' j ̃ A' d K' v t q p i ' e a e' p j « ' o a { . ' e a e  
x ' v ' r j a v u l p j ' d K' O N q K' o a { ' p < { ' e » " w' k o " ' d p  
t v' e c q' r j A' j r' x k p j pi ' b o ' k' v pi ' n j e' p i j k v

} \* ̃ A ̃ ] ̃ O f } \* ̃ A ̃ \* @ ̃ A ̃ @ } \* ̃ A ̃ } @ ̃ V @ } \* ̃ A ̃ a ̃ ̃ A ̃ @ } \* ̃ A ̃ a ̃ @

Model : SDC-PL-6

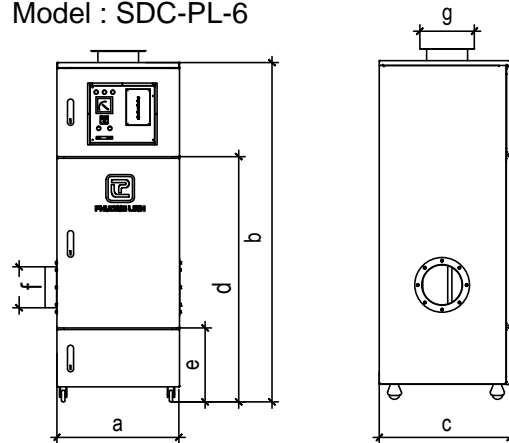

### MEJ 'VJ E'E 'D P

MODEL NO.	Kích Thước Chi Tiết ( mm )						
	a	b	c	d	e	f	g
SDC-PL-6	700	1750	700	1350	350	Ø150	250

### VJ ~ PI 'U 'M 'VJ W V

MODEL NO.	Process flow ( m <sup>3</sup> / m j n )	Filtering Area m <sup>2</sup>	Filtering Velocity m / min	Static pressure ( mm A q )	Motor Kw ( HP )	Number of filter	Outlet Duct ( Ø ) ( mm )
	Min. ~ Max						
SDC-PL-6	16~25	11.2	1.0~2.0	200~300	1.5(2)	6	200