

VariCel® II M VariCel® II MH

*Extended Surface
Mini-Pleat Filters with
Metal Cell Sides and Headers
Available with Intersept®*

- **Metal Construction Improves Performance Under the Most Difficult Operating Conditions**
- **Available with (VariCel II MH) and without (VariCel II M) Metal Header**
- **Superior Moisture Resistance**
- **Engineered to Improve Indoor Air Quality (IAQ)**
- **True High-Efficiency Filters (Only 4" Thick Media Pack)**
- **Three Efficiencies: 90-95%, 80-85%, 60-65%**
- **Available with Intersept® Antimicrobial**

AAF now offers two models in its VariCel II line of high-efficiency, mini-pleat filters with metal cell sides: the VariCel II M and the VariCel II MH. Both filters are constructed using the same high standards for efficiency and performance of the original VariCel II. The media is also the same, using microglass paper, with water repellent binder, and the mini-pleat design of the original. The difference is the VariCel II M and MH are built with metal cell sides. The VariCel II MH includes a metal header and uses AAF's unique interlocking cell sides and header. The VariCel II M uses a U-channel frame to fit in side access and front access systems designed to take a 4" deep box style filter.

This combination of unique design and metal cell sides and headers means the VariCel II M and MH work well in turbulent operating

conditions and in environments where high moisture content is an issue. When combined with the water repellent binder used in the media, the metal construction makes the M and MH highly moisture resistant. In addition, the metal header model makes it an easy fit in side access systems.

UNIQUE COMBINATION OF HIGH PERFORMANCE AND COST-SAVING FEATURES

- Ideal for the most difficult operating conditions, especially where moisture is an issue
- Microglass paper media with water repellent binder
- Available with Intersept® in 90-95% and 60-65% efficiencies
- Slim line packaging reduces shipping costs and storage space
- VariCel II MH header has rolled edges for safe handling
- Easy to install and remove


SLIM-LINE DESIGN

The slim-line design of the VariCel II M and MH provides minimum resistance and maxi-

mum dust loading capacity, while lowering operating costs. Rows of adhesive beads are used to maintain even pleat spacing and provide maximum airflow with minimal resistance. The consistent pleat spacing of the media allows higher dust holding capacity and full use of the entire depth of the media.

AVAILABLE WITH Intersept® ANTIMICROBIAL

90-95% and 60-65% efficient VariCel II M and MH filters are available with Intersept® antimicrobial. Intersept® acts as a preservative to ensure the integrity of the media throughout the life of the filter. EPA registered and environmentally safe, Intersept® inhibits the growth of microorganisms documented to affect IAQ.

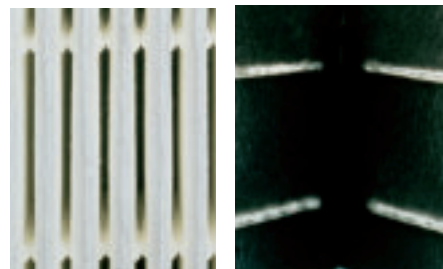


VariCel® II MH

VariCel® II M

VariCel® II M / VariCel® II MH with Intersept®


OPERATING DATA

Initial Resistance vs. Filter Face Velocity

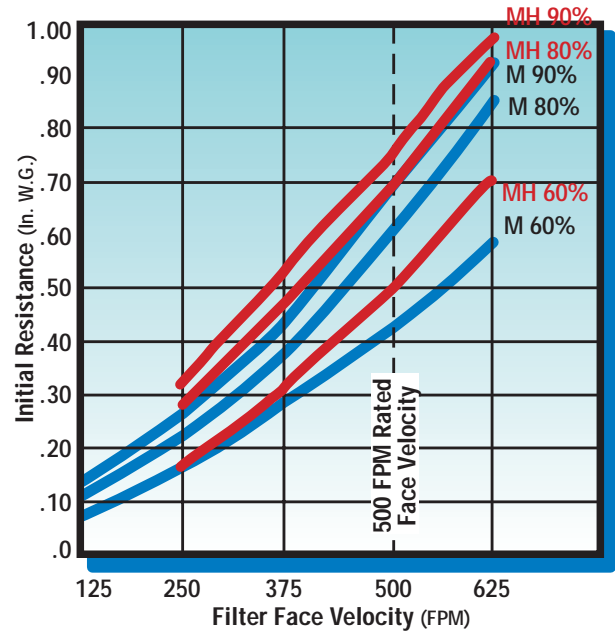

DUAL-DENSITY MEDIA INCREASES DUST HOLDING CAPACITY

VariCel II M and MH filters use media of microglass paper with a water repellent binder. The fibers are formed with dual-density construction, consisting of coarser fibers on the air entering side and finer fibers on the air leaving side. This design allows for collection of particulate throughout the full thickness of the media, substantially increasing dust holding capacity. The media is water repellent and can withstand intermittent exposure to water without affecting performance.

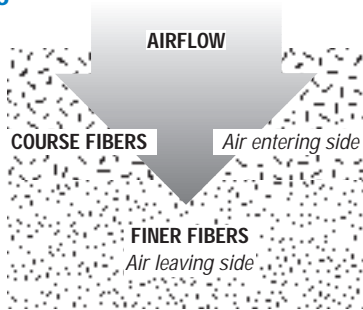

VARICEL® II M AND MH PRODUCT INFORMATION

⁽¹⁾ Rated Filter Face Velocity (FPM)	⁽²⁾ Nominal Size (Inches) (W x H x D)	⁽³⁾ Actual Size (Inches) (W x H x D)	⁽⁴⁾ Rated AirFlow Capacity (CFM)	VariCel II M ⁽⁵⁾ Rated Initial Resistance (In W.G.)	VariCel II MH ⁽⁵⁾ Rated Initial Resistance (In W.G.)	⁽⁶⁾ Recommended Final Resistance (In W.G.) VariCel II M MH	VariCel II M Gross Media Area (Sq. Ft.)	VariCel II MH Gross Media Area (Sq. Ft.)
90-95% AVERAGE EFFICIENCY (Available with Intersept®)								
500	24 x 24 x 4 ⁽⁶⁾	23-3/8 x 23-3/8 x 4-1/4	2000	.70	.75	1.5 1.5	127	111
	20 x 25 x 4	19-3/8 x 24-3/8 x 4-1/4	1750	.70	.75	1.5 1.5	111	96
	20 x 24 x 4 ⁽⁶⁾	19-3/8 x 23-3/8 x 4-1/4	1650	.70	.75	1.5 1.5	106	91
	20 x 20 x 4	19-3/8 x 19-3/8 x 4-1/4	1400	.70	.75	1.5 1.5	88	75
	18 x 24 x 4	17-3/8 x 23-3/8 x 4-1/4	1500	.70	.75	1.5 1.5	95	81
	16 x 25 x 4	15-3/8 x 24-3/8 x 4-1/4	1400	.70	.75	1.5 1.5	88	74
	16 x 20 x 4	15-3/8 x 19-3/8 x 4-1/4	1100	.70	.75	1.5 1.5	70	58
	12 x 24 x 4 ⁽⁶⁾	11-3/8 x 23-3/8 x 4-1/4	1000	.70	.75	1.5 1.5	63	50
80-85 AVERAGE EFFICIENCY								
500	24 x 24 x 4 ⁽⁶⁾	23-3/8 x 23-3/8 x 4-1/4	2000	.65	.70	1.5 1.5	127	111
	20 x 25 x 4	19-3/8 x 24-3/8 x 4-1/4	1750	.65	.70	1.5 1.5	111	96
	20 x 24 x 4 ⁽⁶⁾	19-3/8 x 23-3/8 x 4-1/4	1650	.65	.70	1.5 1.5	106	91
	20 x 20 x 4	19-3/8 x 19-3/8 x 4-1/4	1400	.65	.70	1.5 1.5	88	75
	18 x 24 x 4	17-3/8 x 23-3/8 x 4-1/4	1500	.65	.70	1.5 1.5	95	81
	16 x 25 x 4	15-3/8 x 24-3/8 x 4-1/4	1400	.65	.70	1.5 1.5	88	74
	16 x 20 x 4	15-3/8 x 19-3/8 x 4-1/4	1100	.65	.70	1.5 1.5	70	58
	12 x 24 x 4 ⁽⁶⁾	11-3/8 x 23-3/8 x 4-1/4	1000	.65	.70	1.5 1.5	63	50
60-65% AVERAGE EFFICIENCY								
500	24 x 24 x 4 ⁽⁶⁾	23-3/8 x 23-3/8 x 4-1/4	2000	.45	.50	1.5 1.5	127	111
	20 x 25 x 4	19-3/8 x 24-3/8 x 4-1/4	1750	.45	.50	1.5 1.5	111	96
	20 x 24 x 4 ⁽⁶⁾	19-3/8 x 23-3/8 x 4-1/4	1650	.45	.50	1.5 1.5	106	91
	20 x 20 x 4	19-3/8 x 19-3/8 x 4-1/4	1400	.45	.50	1.5 1.5	88	75
	18 x 24 x 4	17-3/8 x 23-3/8 x 4-1/4	1500	.45	.50	1.5 1.5	95	81
	16 x 25 x 4	15-3/8 x 24-3/8 x 4-1/4	1400	.45	.50	1.5 1.5	88	74
	16 x 20 x 4	15-3/8 x 19-3/8 x 4-1/4	1100	.45	.50	1.5 1.5	70	58
	12 x 24 x 4 ⁽⁶⁾	11-3/8 x 23-3/8 x 4-1/4	1000	.45	.50	1.5 1.5	63	50

(1) Filters can be operated up to 125% of rated face velocity.

(2) Width and height dimensions are interchangeable. VariCel II M and MH filters may be installed with the pleats either vertical or horizontal.

(3) All performance data based on ASHRAE 52.1-1992 test method. Performance tolerances conform to Section 7.4 of ARI Standard 850-93. For maximum service life, VariCel II MH filters should always be operated with a prefilter.

Underwriters Laboratories Classification: All VariCel II M and MH filters are classified U.L. Class 2. Testing was performed according to U.L. Standard 900 and CAN 4-S111.

(4) The final operating resistance shown is typical of systems currently in operation. Filters can be operated to a higher or lower final resistance without materially affecting filter efficiency; however, dust holding capacity will be reduced if the filters are changed at a lower final resistance.

(5) VariCel II M and MH filters are packed two per carton.

(6) Available for side access installations designed with a 13/16" wide stationary track.

Continuous Operating Temperature Limits: 150°F (66°C)



10300 ORMSBY PARK PL STE 600
LOUISVILLE KY 40223-6169
P O BOX 35690
LOUISVILLE KY 40232-5690
www.aafintl.com

For Additional Information On AAF Products,
Call The Answer Center
888.AAF.2003

