

604 Differential Pressure Switch

Features

- Low cost, high quality.
- Visual switching point setup.
- With repeat accuracy of 2%.
- With housing fitted by a single screw.
- Easy to install, supplied with standard mounting accessories.



Specifications

Range: 20~1000Pa

Max. Static Pressure: 1000Pa

Protection Standard: IP54

Output contact Load: 2A at 250V, contact switch

Weight: 100g

Dimensions: $\Phi 81 \times 53$

Testing Standards: EN61058, DIN3398

Temperature Limit: -15°C to 60°C.



Accessories: plastic tubing $\Phi 6.2\text{mm}$, 1.8m

Bracket type Z 1 pc

Screws 3 pcs

Pressure connection tubing 2 pcs

Dimensions (mm)

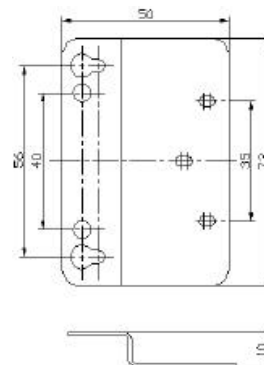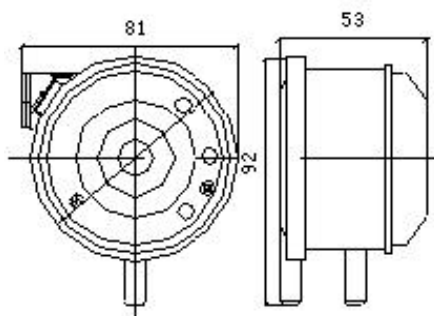

Models & Ranges

Model No.	DP Range (Pa)	Model No.	DP Range	Model No.	DP Range
604-0	20~300				
604-1	30~300				
604-2	50~500				
604-3	100~1000				