




unidirectional flow

When you need a perfect unidirectional air flow – CamHosp is the product you need. In general, CamHosp can be installed in two to three hours by two people. The plenum, structure and filters are provided with very detailed instructions. On request Camfil will assemble the unit and/or test it. Use Screentech and increase lifetime for filter by protecting them from example splash.

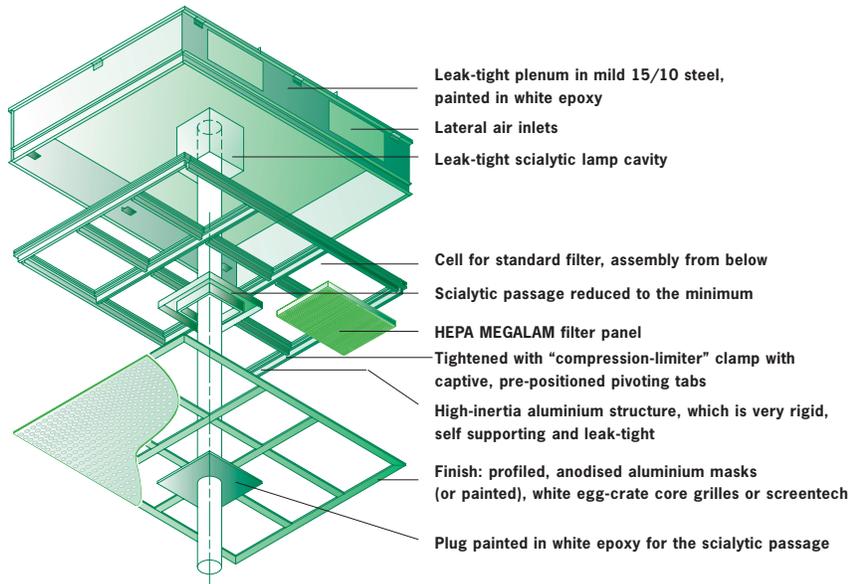


TYPE 4
 9600 m³/h to 0.30 m/s
 8000 m³/h to 0.25 m/s
 10 m²

The type 4 CamHosp ceiling has an operating area of approximately 10 m² in ISO classes 5 to 7. It is ideal for major operations (orthopaedic, cardio, etc.), as it offers the surgical team alarge degree of ease (UNICLIMA recommendation in the Guide to air treatment in hospital environments). Used at a speed of 0.25 m/s – 0.30 m/s, this model produces an air change rate in the region of 60 to 70 vol/h for a 45 m² operating theatre suite.



TYPE 3
 6000 m³/h to 0.30 m/s
 5000 m³/h to 0.25 m/s
 7 m²



TYPE 2
 4400 m³/h to 0.30 m/s
 3700 m³/h to 0.25 m/s
 5 m²

Types 3 and 2 with blowing areas of 7 and 5m² meet the needs for less major surgeries. A type 3 CamHosp, for example, ensures the minimum rate required by the NF S90-351 standard in zone 4 (50 vol/h) for a 40m² operating theatre suite, operating at an average speed of 0.30 m/s.



TYPE LIT
 1800 m³/h to 0.30 m/s
 1500 m³/h to 0.25 m/s
 2 m²

In extremely sensitive departments (major burns, immunodeficient patients, etc.) CamHosp includes a format adapted to provide localised protection of a bed.