

Technical Performance

LS Cast Resin Transformers

50kVA Through 15,000kVA
Primary Voltage: 2.3kV Through 36kV
Secondary Voltage: 120V Through 24kV





LS Cast Resin Transformer

Introduction

Great progress has been made in the development and improvement of distribution transformers over the last decades.


The application of high quality insulation material and suitable selection of the coil structure for high stress have contribute to the development of LS CAST RESIN Transformers.

The LS CAST RESIN Transformer has succeeded in combining the advantage of oil-filled and conventional dry type transformers, which are fabricated with an epoxy resin. The windings are completely embeded under vacuum conditions. This casting method makes it possible to assure void-free epoxy penetration of both the inner layer and turn to turn insulation.



CONTENTS

Applications	4
Feature	5
Construction	6
Specification	7
Technical Data (ANSI Standard)	9
Technical Data (IEC Standard)	11
Manufacturing Process	14
Quality Assurance	15
Ordering Sheet	16

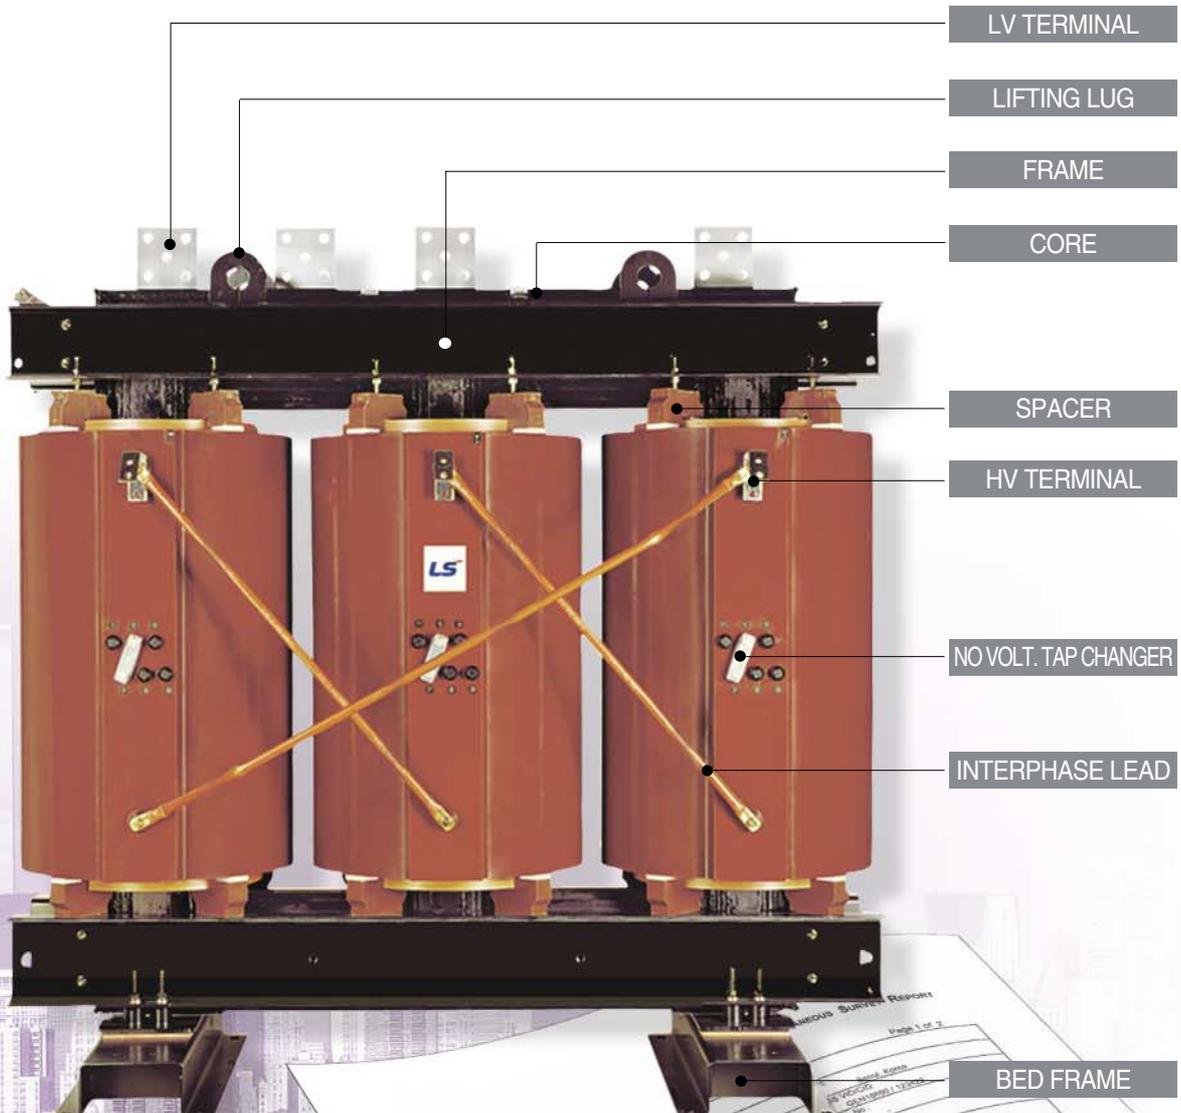

Survey Report

Page 1 of 2

ABS

SURVEY OF TRANSFORMER

Report No. 25592452 Date: 11 October 2007

Vessel's Name: -

Manufacturer: LS Industrial Systems Co., Ltd.

Purchaser's Designation: -

Location: Cheongju, Korea

Serial Number: 20022502

Material Test Report No.: -

Task No.: 277358

Date Approved: 01 October 2007

Service Use: -

Project: -

Inspector: -

Test Program: -

ABS Report No.: -

THIS IS TO CERTIFY that the undersigned Surveyor in the Bureau selected for the above survey and reports as follows:

One(1) set of three(3) phase dry type transformer

Capacity: 300 KVA

Rated voltage & Frequency: 440/220, 60Hz

Insulation: Class "F"

The following tests were carried out and considered satisfactory:


1. Voltage ratio test, phase relation and polarity test.
2. Dielectric strength test
 - Primary windings @ 500V x 60Hz for 60 seconds
 - Secondary windings @ 500V x 60Hz for 60 seconds
3. Secondary winding test and winding resistance measurement
4. Insulation resistance test @ 40V x 600Hz for 15 seconds
5. No load test, load test and impedance voltage measurement
6. Reviewed Temperature rise test report

K. Y. Yu, Surveyor, American Bureau of Shipping

Applications

LS CAST RESIN Transformers can be used in various fields. Here are just a few possible applications.

- Indoor and outdoor unit substations
- Off-shore flatforms
- Commercial buildings
- Hospitals
- Shopping centers
- Water supplies
- Traction systems
- SCR Power supplies

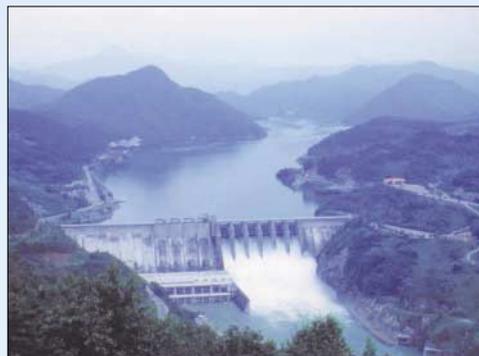

Environmentally safe

LS CAST RESIN Transformers will not emit oil or toxic gases into the atmosphere. Therefore, they do not pollute the environment and are strongly recommended as a replacement for askarel(PCB)-filled transformers.

Moisture proof

The complete casting of coils under vacuum prevents the penetration of moisture into the winding.


Therefore, it is suitable for both storage and operation in harsh environment and is capable of being switched on immediately after such storage without pre-drying.

No partial discharge

There is no possibility of partial discharge in LS CAST RESIN Transformers.

Whole core & coil is tested to guarantee the life expectancy of the insulation system.

LS CAST RESIN Transformers are free of partial discharge at least up to 1.3 times of the rated voltage.

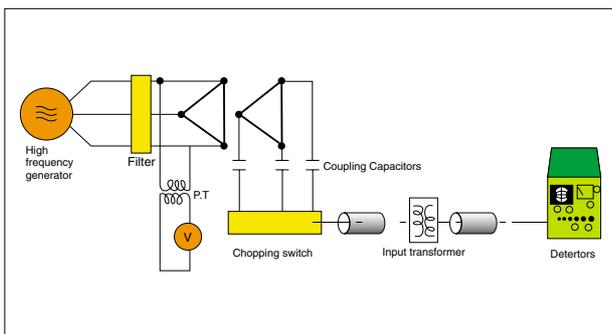

Low noise

The coating of the core with an epoxy resin have lead to an appreciable noise reduction. Noise is also reduced due to the sound suppressing effect of the step lap cutting.

High overload capability

Based on the high thermal time constant factor of the windings, LS CAST RESIN Transformers can be overloaded for a short duration considerably higher than oil-immersed transformers. It has a greater capability to withstand sudden high overloads such as might be encountered in heavy traction applications.

High impulse strength

LS CAST RESIN Transformers are very resistant to impulse voltage.

Impulse withstand levels to 200kV are available because of careful design and special structure.

Maintenance free

Maintenance is almost completely eliminated. No checking of liquid level and no dielectric test for moisture absorption is required.

Due to the smooth coil surface, heavy dirt and dust build up is eliminated even under the worst circumstances.

The recommended routine maintenance is an occasional visual inspection.

Fire resistant

LS CAST RESIN Transformers have a very excellent characteristic of self fire-extinguishing and fire resistance.

So there would be no fear of spread of fire even if fire took place around the electricity room.

LS CAST RESIN Transformers take pride in the ability to offer a wide variety of designs and configurations necessary to satisfy customer needs. Computer and CAD/CAM systems are used for quick and accurate design and manufacture to meet specific customer requirements.

➤ CORE & FRAME

The core is made of highest quality, cold rolled, grain-oriented, silicon steel and step lap joint.

Three legs of the core are arranged in a single plane and interconnected with a yoke.


The legs are circular structure and are carefully interlaced with stepwise arranged yokes.

The core is mitred at a 45 degree angle and care-fully stacked and pressed to obtain low loss, exciting current and noise.

The core is insulated on both side of each lamination and protected against corrosion by a resin coating and grounded in frame.

The frame consists of upper and lower steel channels. It holds the core and coil together.

To protect against corrosion, all steel parts are coated with epoxy paint.

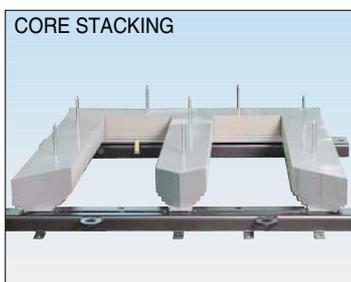

➤ HV & LV Coils

- **HV COIL (Vacuum Cast type)**

- HV COIL Vacuum Cast in epoxy with a mold.
- Aluminum / Copper conductor.



- **LV COIL (Encapsulated Cast type)- standard**

- LV COIL Encapsulat- ed after winding with prepreg layer insu-lation.
- Aluminum / Copper conductor.



- **LV COIL (Vacuum Cast type)- optional**

- LV COIL Vacuum Cast in epoxy with a mold.
- Aluminum / Copper conductor.



Conductor insulated with a high grade is used in the winding construction.

Turns are arranged in multiple sections and layers in order to decrease transient maximum voltages. High voltage windings are cast in a mold under vacuum, using a computer controlled mixing and vacuum casting process.

So there is no void in the coils. The windings are fiberglass reinforced to provide additional mechanical strength.

After assembly, all HV coils are partial discharge tested to verify void free in the coils.

Specification Data

LS CAST RESIN Transformers are normally available with specification as follows:

- **Rated voltage**
 HV COIL : up to 36kV
 LV COIL : up to 600V
 * Dual High voltage coils can also be supplied.
- **Standard Tapping range : $\pm 2.5\%$, $\pm 5\%$**
 * Other ratings are available by request
- **Power capacity**
 Single phase : 20 ~ 2,000kVA
 Three phase : 50 ~ 15,000kVA
- **Frequency : 50Hz, 60Hz**
 * Other frequency is available by request
- **% Impedance voltage**
 IEC STD : 4 ~ 8%
 ANSI STD : 5.75%
 * Other % impedance voltages are available.
- **Connections**
 HV COIL : Delta
 LV COIL : Star with neutral point
 * Other connections are available to meet requirement.
- **Temperature class (According to IEC 60076-11)**
 HV COIL and LV COIL : F CLASS
 * H class coils are available by request.
- **Conductor**
 Aluminum (standard)
 Copper (optional)
- **Noise Level (according to NEMA Std.)**
 500kVA - 60dB
 750kVA - 64dB
 1000kVA - 64dB
 1500kVA - 65dB
 2000kVA - 66dB
 2500kVA - 68dB
 *Noise reduction TRs are available by request.

Standards

LS CAST RESIN Transformers confirm to the requirements of IEC 60076-11 (2004).

However we can also meet the requirements of the following standards, upon request.

- **ANSI / IEEE C57.12.01 (2005)**
 General requirement for dry-type distribution and power transformers.
- **CSA Standard C9-M1981**
 Dry type transformers.
- **HD538.1,2,3(1995)**
 3 Phase Dry type distribution transformers.
 50Hz from 100kVA to 2500kVA
- **BS 7806 (1995)**
 Dry type Power transformers
- **AS 2374 (1982)**
 Power transformers
 * Transformers for rectifier applications and other special purposes can be supplied according to the client's specification.

Certificates



CESI 

   **KEMA** 

ISO14001, ISO 9001

Accessories

● Normally provided accessories

- HV & LV terminals
- Lifting lugs
- Grounding terminals
- Name plate
- Danger label
- Tap terminal link
- Protection cap for tap terminal
- Anti-vibration pads

● Optional accessories

- Wheels
- Cooling fan & temp. controller
- Digital thermometer & PT 100 OHM (1 Phase)
- Digital thermometer & PT 100 OHM (3 Phase)
- Enclosure


HV terminals




LV terminals



Lifting lugs

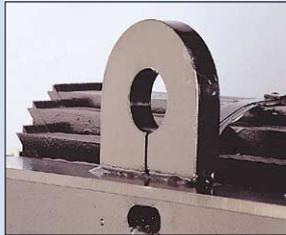


Grounding terminals

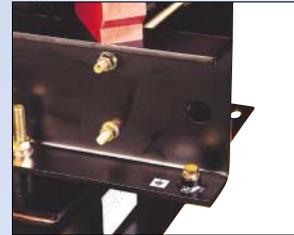

Danger label



Tap terminal link

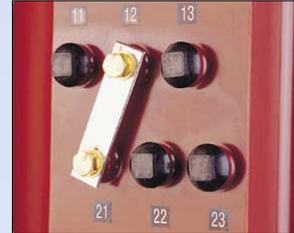

Protection cap



Anti-vibration pads



Wheels



Cooling fan






Temperature controller



Temperature indicator



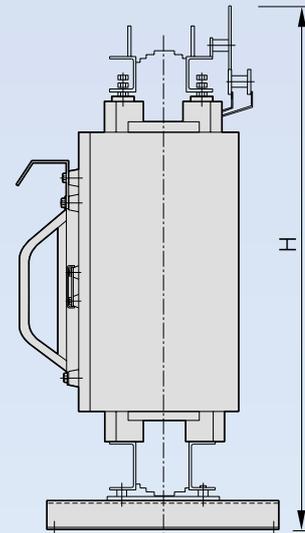
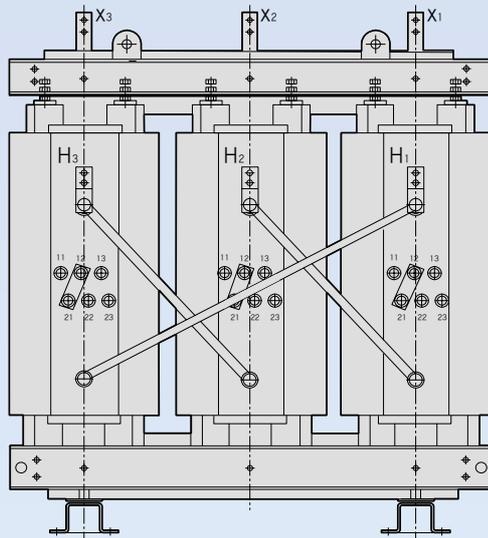
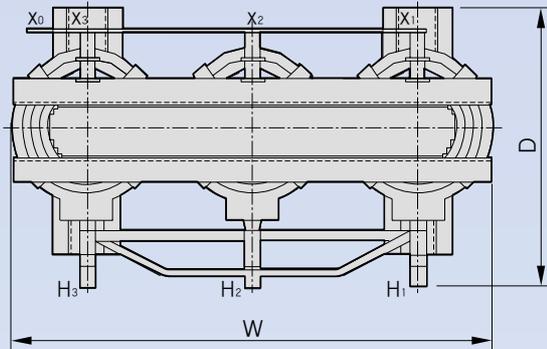


ANSI / IEEE C 57.12.01 (2005)
 F CLASS, 90K TEMP.RISE, 60Hz
 5kV CLASS, 75kV BIL

CAPACITY (kVA)	%IZ (%)	NL-L (W)	L-L (W)	EFFICIENCY (%)			DIMENSION (mm)			WEIGHT (kg)
				100% LOAD	75% LOAD	50% LOAD	W	D	H	
500	5.75	1450	4871	98.75	98.89	98.94	1355	750	1350	2100
750	5.75	2000	5874	98.96	99.06	99.08	1515	750	1350	2750
1000	5.75	2470	7085	99.05	99.14	99.15	1580	950	1485	3350
1500	5.75	3400	10694	99.06	99.17	99.19	1760	950	1725	4570
2000	5.75	4600	12090	99.17	99.24	99.24	1935	950	1755	5750
2500	5.75	5400	14450	99.21	99.28	99.28	1935	1020	1915	6560

* Other kVA is available according to request.




Technical Data (ANSI Standard)

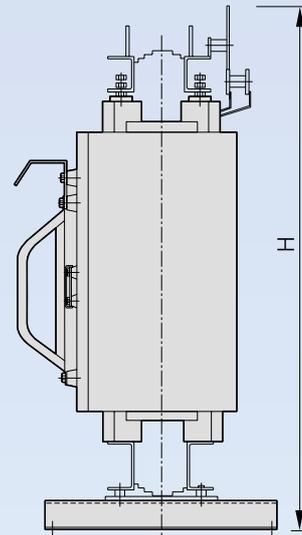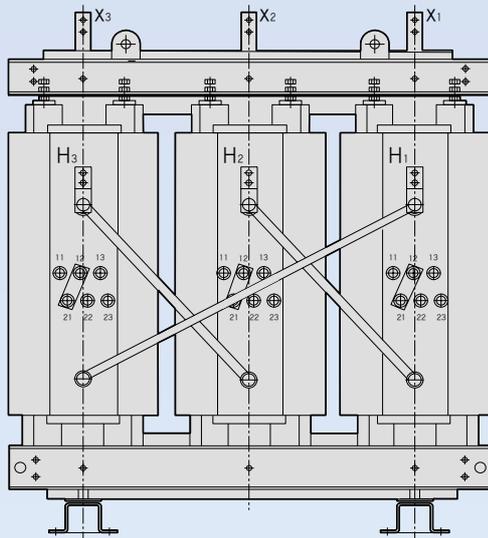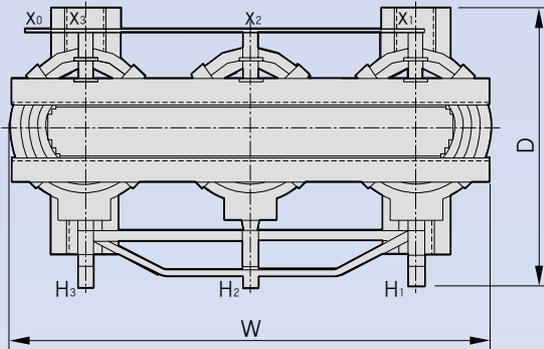

ANSI / IEEE C 57.12.01 (2005)
 F CLASS, 90K TEMP.RISE, 60Hz
 15kV CLASS, 110kV BIL

CAPACITY (kVA)	%IZ (%)	NL-L (W)	L-L (W)	EFFICIENCY (%)			DIMENSION (mm)			WEIGHT (kg)
				100% LOAD	75% LOAD	50% LOAD	W	D	H	
500	5.75	1810	5610	98.53	98.69	98.73	1545	750	1425	2145
750	5.75	2330	6630	98.81	98.93	98.94	1610	750	1535	2745
1000	5.75	2800	7480	98.98	99.07	99.07	1650	950	1665	3395
1500	5.75	3800	8880	99.16	99.22	99.20	1790	950	1745	4385
2000	5.75	4870	13050	99.11	99.19	99.19	1965	950	1875	5340
2500	5.75	5650	15210	99.17	99.24	99.24	1965	1020	1985	6600

* Other kVA is available according to request.

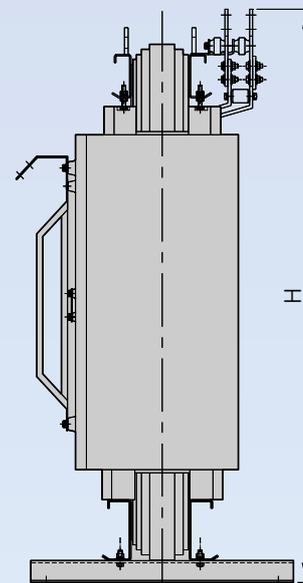
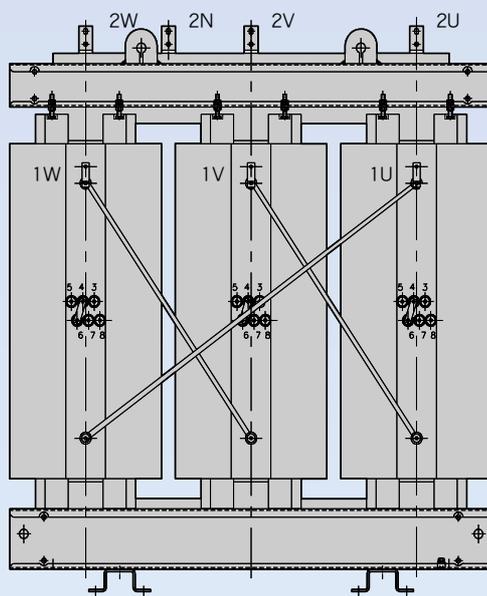
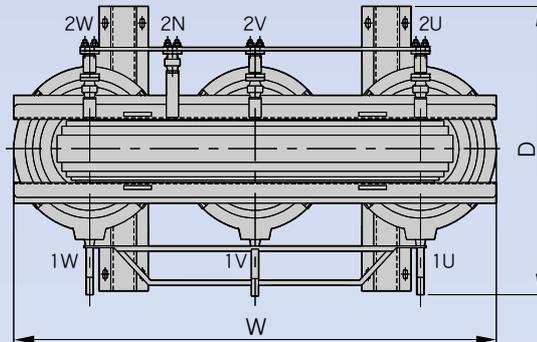


Standard : IEC 60076-11 (2004)
 F CLASS, 100K TEMP.RISE, 12kV CLASS, 50Hz
 75 BIL

Rated Power (kVA)	Impedance Voltage (%)	No Load Loss (W)	Load Loss (W)	Efficiency (%)			Dimension (mm)			Weight (kg)
				100% Load	75% Load	50% Load	Width (W)	Depth (D)	Height (H)	
400	4.0	1,150	5,200	98.4	98.6	98.8	1,220	800	1,460	1,320
630	4.5	1,450	7,600	98.6	98.8	98.9	1,305	900	1,620	1,750
1,000	6.0	1,950	11,000	98.7	98.9	99.0	1,520	1,000	1,740	2,500
1,250	6.0	2,450	12,500	98.8	99.0	99.1	1,700	1,000	1,820	3,060
1,600	6.5	2,850	14,500	98.9	99.0	99.2	1,760	1,200	2,000	3,750
2,000	6.5	3,700	16,500	99.0	99.1	99.2	1,940	1,200	2,150	4,750
2,500	7.5	4,200	19,000	99.1	99.2	99.3	2,115	1,200	2,190	5,600

* Other kVA is available according to request.




Technical Data (IEC Standard)

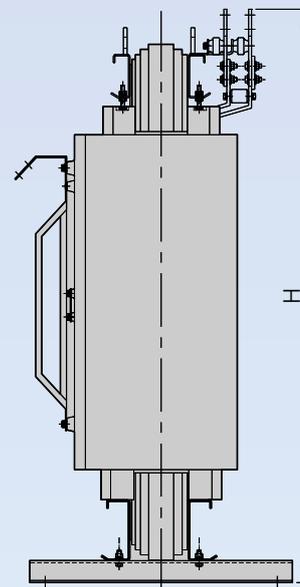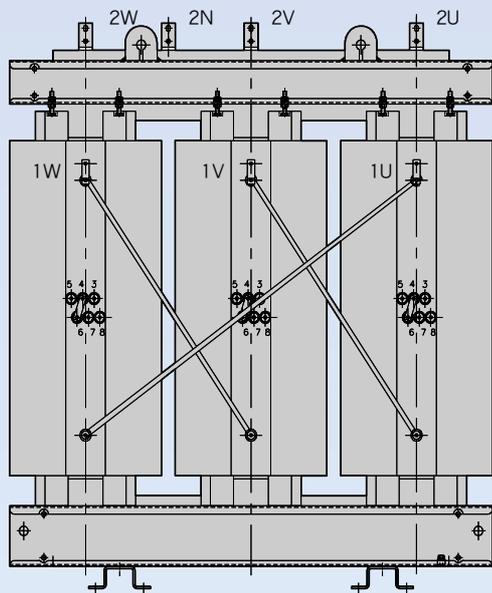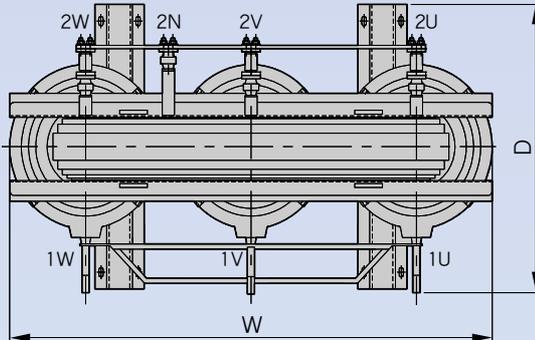

Standard : IEC 60076-11 (2004)
 F CLASS, 100K TEMP.RISE, 24kV CLASS, 50Hz
 125 BIL

Rated Power (kVA)	Impedance Voltage (%)	No Load Loss (W)	Load Loss (W)	Efficiency (%)			Dimension (mm)			Weight (kg)
				100% Load	75% Load	50% Load	Width (W)	Depth (D)	Height (H)	
400	6.0	1,200	6,000	98.2	98.5	98.6	1,350	800	1,540	1,400
630	6.0	1,650	7,800	98.5	98.7	98.8	1,500	900	1,710	2,060
1,000	6.0	2,300	11,500	98.6	98.8	98.9	1,670	1,000	1,850	2,860
1,250	7.0	2,550	13,000	98.7	98.9	99.0	1,750	1,000	1,900	3,220
1,600	7.0	3,050	16,000	98.8	99.0	99.1	1,810	1,200	2,080	3,840
2,000	7.0	4,050	17,500	98.9	99.0	99.1	1,990	1,200	2,210	4,750
2,500	7.5	4,600	20,500	99.0	99.1	99.2	2,160	1,200	2,250	5,530

* Other kVA is available according to request.

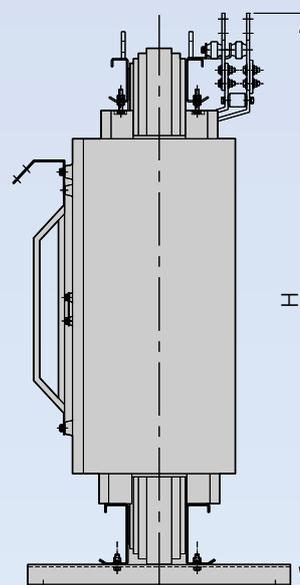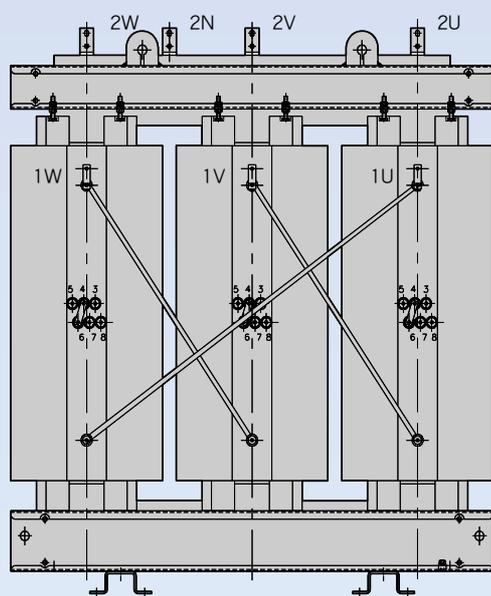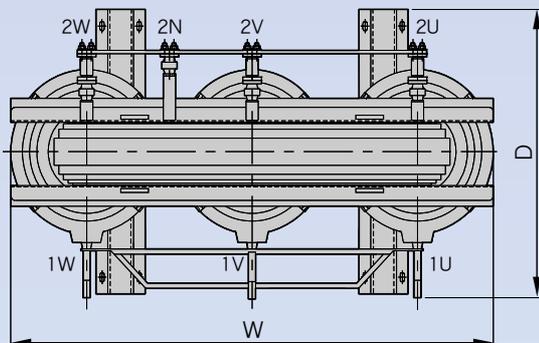

Standard : IEC 60076-11 (2004)
 F CLASS, 100K TEMP.RISE, 36kV CLASS, 50Hz
 170 BIL

Rated Power (kVA)	Impedance Voltage (%)	No Load Loss (W)	Load Loss (W)	Efficiency (%)			Dimension (mm)			Weight (kg)
				100% Load	75% Load	50% Load	Width (W)	Depth (D)	Height (H)	
630	6.0	2,200	7,200	98.5	98.6	98.7	1,720	1,000	1,910	2,650
1,000	6.0	3,000	8,600	98.8	98.9	98.9	1,880	1,200	2,050	3,700
1,250	6.5	3,650	11,000	98.8	98.9	98.9	2,060	1,200	2,100	4,400
1,600	7.5	3,900	14,500	98.8	99.0	99.0	2,110	1,200	2,280	4,900
2,000	7.5	4,850	15,500	98.9	99.1	99.1	2,290	1,200	2,390	6,000
2,500	7.0	6,300	18,000	99.0	99.1	99.1	2,470	1,200	2,460	7,400

* Other kVA is available according to request.

Manufacturing Process

CORE CUTTING



COIL WINDING



CORE STACKING



CASTING



ASSEMBLY



TEST



➤ Routine Test

the following tests are made on all transformer.

- Resistance measurements
- Ratio tests
- Polarity and phase relation test
- Impedance and load loss
- No load loss and exciting current
- Applied potential tests
- Double induced potential tests
- Partial discharge test(below 10 PC)

➤ Optional Test

- Impulse test
- Temperature test
 - Temperature rise test carried out according to the simulated loading method.
 - no load losses
 - load losses
 - The total temperature rise is calculated in accordance with IEC 60076-11 or ANSI
- Short circuit test
 - 3P 1600kVA Certified by KEMA
- Audible sound level test
 - test by IEC 60076-10
 - LS use Pressure Level (Lp).
 - $Lw(A) = Lp(A) + 10 \text{ LOG } S$
 - $S = 1.25 \times H \times P$
 - H : Transformer height
 - P : Measurement contour perimeter
- Climatic, environmental and fire behaviour classes
 - Certificated at CESI according to IEC 60076-11
 - Fire Behavior Class : F1
 - Environmental Class : E2
 - Climatic Class : C1
 - Class C2 is available

ROUTINE TEST



IMPULSE TEST



SHORT CIRCUIT TEST



FIRE BEHAVIOR TEST



Ordering Sheet

Ref. No. : _____

Date. : _____

End User and Location :

ITEM	TR.-1	TR.-2	TR.-3	TR.-4
Rated kVA				
Q'ty (sets)				
Rated Voltage(V)	Primary(V)			
	Secondary(V)			
Connection	Primary			
	Secondary			
Phase (ϕ)				
% Impedance (%)				
1. Frequency	<input type="checkbox"/> 50Hz	<input type="checkbox"/> 60Hz	<input type="checkbox"/> Other	
2. Conductor	<input type="checkbox"/> Maker Standard	<input type="checkbox"/> Copper	<input type="checkbox"/> Aluminum	<input type="checkbox"/> Other
3. Primary Taps	<input type="checkbox"/> $\pm 2 \times 2.5\%$	<input type="checkbox"/> $\pm 2.5\%$	<input type="checkbox"/> Other	
4. Applied standard	<input type="checkbox"/> IEC	<input type="checkbox"/> ANSI/IEEE	<input type="checkbox"/> BS	<input type="checkbox"/> Other
5. Insulation Class				
Primary	<input type="checkbox"/> Maker Standard(155°C)			<input type="checkbox"/> Other
Secondary	<input type="checkbox"/> Maker Standard(155°C)			<input type="checkbox"/> Other
6. Winding Temperature Rise				
Primary	<input type="checkbox"/> Maker Standard	<input type="checkbox"/> 80°C	<input type="checkbox"/> 100°C	<input type="checkbox"/> 115°C <input type="checkbox"/> Other
Secondary	<input type="checkbox"/> Maker Standard	<input type="checkbox"/> 80°C	<input type="checkbox"/> 100°C	<input type="checkbox"/> 115°C <input type="checkbox"/> Other
7. Accessories	<input type="checkbox"/> Digital Thermometer <input type="checkbox"/> Cooling Fans controller <input type="checkbox"/> Cooling fans <input type="checkbox"/> User Spec. (P V Hz) <input type="checkbox"/> Maker Standard.			
8. Protection	<input type="checkbox"/> IP00	<input type="checkbox"/> IP21	<input type="checkbox"/> IP31	<input type="checkbox"/> Other
9. Attached specification (<input type="checkbox"/> Yes , <input type="checkbox"/> No) , If "Yes" (Total page : pages)				
10. Remarks				
1.				
2.				
3.				

Green Innovators of Innovation



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact a qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

LSIS Co., Ltd.

© 2001.4 LSIS Co.,Ltd. All rights reserved.


www.lsis.biz

■ HEAD OFFICE

Korea Gyeonggi-do Anyang-si dongan-gu
LS-ro 127 (Hogye-dong)
Tel. (82-2)2034-4887, 4873, 4148
Fax. (82-2)2034-4648

■ CHEONG-JU PLANT

Cheong-Ju Plant #1, Song Jung Dong, Hung Duk Ku,
Cheong Ju, 361-720, Korea

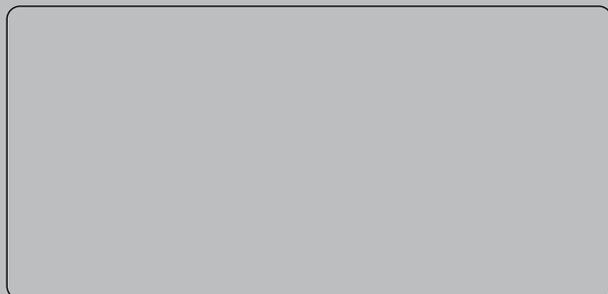

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.

■ Global Network

- **LSIS (Middle East) FZE >> Dubai, U.A.E.**
Address: LOB 19 JAFZA VIEW TOWER Room 205, Jebel Ali Freezone P.O. Box 114216, Dubai, United Arab Emirates
Tel: 971-4-886 5360 Fax: 971-4-886-5361 e-mail: jungyongl@lsis.biz
- **Dalian LSIS Co., Ltd. >> Dalian, China**
Address: No.15, Liaohexi 3-Road, Economic and Technical Development zone, Dalian 116600, China
Tel: 86-411-8273-7777 Fax: 86-411-8730-7560 e-mail: lixx@lsis.com.cn
- **LSIS (Wuxi) Co., Ltd. >> Wuxi, China**
Address: 102-A, National High & New Tech Industrial Development Area, Wuxi, Jiangsu, 214028, P.R.China
Tel: 86-510-8534-6666 Fax: 86-510-522-4078 e-mail: xuhg@lsis.com.cn
- **LSIS-VINA Co., Ltd. >> Hanoi, Vietnam**
Address: Nguyen Khe - Dong Anh - Ha Noi - Viet Nam
Tel: 84-4-882-0222 Fax: 84-4-882-0220 e-mail: srjo@lsisvina.com
- **LSIS-VINA Co., Ltd. >> Hochiminh, Vietnam**
Address: 41 Nguyen Thi Minh Khai Str. Yoco Bldg 4th Floor, Hochiminh City, Vietnam
Tel: 84-8-3822-7941 Fax: 84-8-3822-7942 e-mail: sbpark@lsisvina.com
- **LSIS Shanghai Office >> Shanghai, China**
Address: Room E-G, 12th Floor Huamin Empire Plaza, No.726, West Yan'an Road Shanghai 200050, P.R. China
Tel: 86-21-5237-9977 (609) Fax: 89-21-5237-7191 e-mail: jinhk@lsis.com.cn
- **LSIS Beijing Office >> Beijing, China**
Address: B-Tower 17FL.Beijing Global Trade Center B/D. No.36, BeiSanHuanDong-Lu, DongCheng-District, Beijing 100013, P.R. China
Tel: 86-10-5825-6025,7 Fax: 86-10-5825-6026 e-mail: cuixiaorong@lsis.com.cn
- **LSIS Guangzhou Office >> Guangzhou, China**
Address: Room 1403,14F,New Poly Tower,2 Zhongshan Liu Road,Guangzhou, P.R. China
Tel: 86-20-8326-6764 Fax: 86-20-8326-6287 e-mail: linsz@lsis.biz
- **LSIS Chengdu Office >> Chengdu, China**
Address: Room 1701 17Floor, huanminhanjun international Building, No1 Fuxing Road Chengdu, 610041, P.R. China
Tel: 86-28-8670-3101 Fax: 86-28-8670-3203 e-mail: yangcf@lsis.com.cn
- **LSIS Qingdao Office >> Qingdao, China**
Address: 7B40,Haixin Guangchang Sheny Building B, No.9, Shandong Road Qingdao 26600, P.R. China
Tel: 86-532-8501-6568 Fax: 86-532-583-3793 e-mail: lirj@lsis.com.cn
- **LSIS NETHERLANDS Co.Ltd >> Qingdao, Netherlands**
Address: 1st. Floor, Tupolevlaan 48, 1119NZ,Schiphol-Rijk, The Netherlands
Tel: 31-20-654-1420 Fax: 31-20-654-1429 e-mail: junshickp@lsis.biz
- **LSIS Gurgaon Office >> Gurgaon, India**
Address: 109 First Floor, Park Central, Sector-30, Gurgaon- 122 002, Haryana, India