





SAC 340 / S MOL

Designed for direct mounting to ceiling with single parabolic mirror optic louvre with christmas profile cross blades. Louvre reflection by means of slide lock set and can be lowered and hang from either side. Mainly used for general lighting in offices, supermarkets and complexes.



TM5 Utilization Factors

Utilization factors			LOR=68.9%			DLOR=68.9%			ULOR=0.0%		
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	48	54	58	61	65	68	70	72	74
	0.3		44	50	55	58	62	65	67	70	72
	0.1		40	47	51	55	59	63	65	68	70
0.5	0.5	0.2	47	53	57	60	63	66	67	69	71
	0.3		43	49	54	57	61	63	65	68	69
	0.1		40	47	51	54	58	61	63	66	68
0.3	0.5	0.2	46	52	56	58	61	64	65	67	68
	0.3		43	49	53	55	59	62	63	66	67
	0.1		40	46	50	53	57	60	62	64	66
0.0	0.0	0.0	39	45	49	51	55	57	59	61	63
			SHR NOM =1.25			SHR MAX =1.29			SHR MAX TR =1.34		

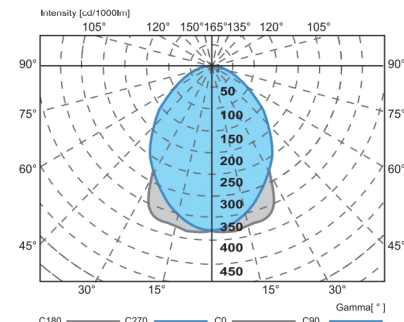

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
Louvres	Anodised aluminium in either specular, semi specular or matt with profile cross blades.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 18W, 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional/ Components	Fused terminal block/Electronic ballast/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 120 / S MOL (1x2)	1x18W	612	-	302	-	90	-
SAC 220 / S MOL	2x18W	612	-	598	-	90	-
SAC 320 / S MOL	3x18W	612	-	598	-	90	-
SAC 420 / S MOL	4x18W	612	-	598	-	90	-
SAC 140 / S MOL	1x36W	1222	-	302	-	90	-
SAC 240 / S MOL (1x4)	2x36W	1222	-	302	-	90	-
SAC 240 / S MOL	2x36W	1222	-	598	-	90	-
SAC 340 / S MOL	3x36W	1222	-	598	-	90	-
SAC 440 / S MOL	4x36W	1222	-	598	-	90	-




Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.



SAC 240 /S VDU


Fully complete with light distribution requirement of CIBSE LG3 CATEGORY 2. Designed for direct mounting to ceiling with double parabolic mirror optic louvre. Louvres manufactured by flexible manufacturing system (FMS) for precise, accuracy and optimized product performance. Mainly used for general lighting in offices, supermarkets and complexes.



TM5 Utilization Factors

Utilization factors			Room index									
Room reflection												
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5	
0.7	0.5	0.2	0.52	0.57	0.61	0.64	0.67	0.69	0.70	0.72	0.73	
	0.3		0.48	0.54	0.58	0.61	0.64	0.67	0.68	0.71	0.72	
	0.1		0.45	0.51	0.56	0.58	0.62	0.65	0.67	0.69	0.71	
0.5	0.5	0.2	0.51	0.56	0.60	0.62	0.65	0.67	0.68	0.70	0.71	
	0.3		0.47	0.53	0.57	0.60	0.63	0.65	0.66	0.68	0.70	
	0.1		0.45	0.51	0.55	0.58	0.61	0.63	0.65	0.67	0.68	
0.3	0.5	0.2	0.50	0.55	0.58	0.61	0.63	0.65	0.66	0.67	0.68	
	0.3		0.47	0.53	0.56	0.58	0.61	0.63	0.65	0.66	0.67	
	0.1		0.45	0.51	0.54	0.57	0.60	0.62	0.63	0.65	0.66	
0.0	0.0	0.0	0.44	0.49	0.53	0.55	0.58	0.60	0.61	0.62	0.63	

SHR NOM =1.25

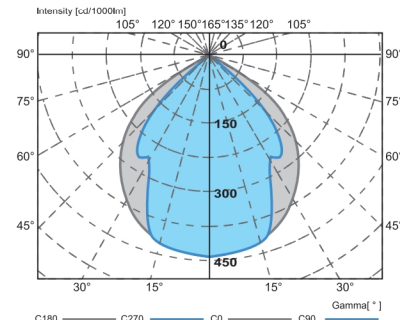

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
Louvres	High quality anodised aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 18W, 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional/ Components	Fused terminal block/Electronic ballast/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 220 /S VDU	2x18W	612	-	598	-	100	-
SAC 240 /S VDU (1x4)	2x36W	1222	-	302	-	100	-
SAC 240 /S VDU	2x36W	1222	-	600	-	100	-
SAC 320 /S VDU	3x18W	612	-	598	-	100	-
SAC 340 /S VDU	3x36W	1222	-	600	-	100	-
SAC 420 /S VDU	4x18W	612	-	598	-	100	-
SAC 440 /S VDU	4x36W	1222	-	600	-	100	-




Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.




Suitable for DSE application in accordance with CIBSE LG3 due to limited luminance $L \leq 500 \text{ cd/m}^2$ at reference angle above 65° all round. Available in single, twin, triple or quadruple lampways. Lift or tilt, wishbone spring, rocket bolt or spring clip installations. Ideal for office, school, libraries, government building, commercial building where VDT Terminal are frequently used.



TM5 Utilization Factors

Utilization factors			Room index									
Room reflection			Room index									
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5	
0.7	0.5	0.2	48	53	56	58	61	63	64	66	67	
	0.3		45	50	53	56	59	61	63	64	66	
	0.1		43	48	51	54	57	59	61	63	65	
0.5	0.5	0.2	48	52	55	57	60	61	62	64	64	
	0.3		45	49	53	55	58	59	61	62	63	
	0.1		43	47	51	53	56	58	59	61	63	
0.3	0.5	0.2	47	51	54	56	58	59	60	61	62	
	0.3		44	49	52	54	56	58	59	61	61	
	0.1		43	47	50	52	55	57	58	60	61	
0.0	0.0	0.0	41	46	49	51	53	55	56	57	58	
			SHR NOM =1.50			SHR MAX =1.55			SHR MAX			
			TR =1.70									

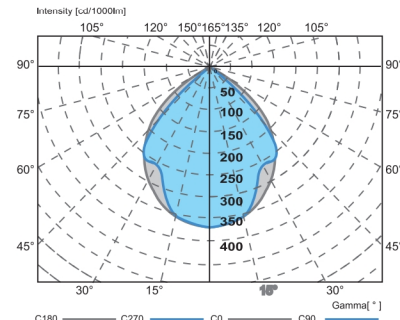

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Louvre	Perforated or White sheet
Reflector	High quality anodised aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamps of 14W & 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional Components	Fused terminal block/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 214 VDU	2x14W	595	-	595	-	70	-
SAC 314 VDU	3x14W	595	-	595	-	70	-
SAC 414 VDU	4x14W	595	-	595	-	70	-
SAC 228 VDU	2x28W	1195	-	595	-	70	-
SAC 228 VDU (1x4)	2x28W	1195	-	295	-	70	-
SAC 328 VDU	3x28W	1195	-	595	-	70	-
SAC 428 VDU	4x28W	1195	-	595	-	70	-



Note : Subject to +/- 1.5mm


*SJ Lite reserves the right to change and amend the specification without prior notice.






SAC 236 PLL VDU

This quality fitting is designed for Surface mounting with symmetrical louver of 16 cells version for the restricted critical angles where VDT's are used. Mainly used for general lighting in offices, supermarkets and complexes.



TM5 Utilization Factors

Utilization factors			LOR =53.0%			DLOR =53.0%			ULOR =0.0%		
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	48	50	52	54	55	56	58	58
	0.3		N.A.	45	48	50	52	54	55	56	57
	0.1		N.A.	44	46	48	51	53	54	55	57
0.5	0.5	0.2	N.A.	47	49	50	53	54	55	56	56
	0.3		N.A.	45	47	49	51	53	53	55	55
	0.1		N.A.	43	46	47	50	51	52	54	55
0.3	0.5	0.2	N.A.	46	48	49	51	52	53	54	54
	0.3		N.A.	44	46	48	50	51	52	53	54
	0.1		N.A.	43	45	47	49	50	51	52	53
0.0	0.0	0.0	N.A.	42	44	45	47	48	49	50	51
			SHR NOM =2.00			SHR MAX =2.24			SHR MAX		
			TR =2.61								

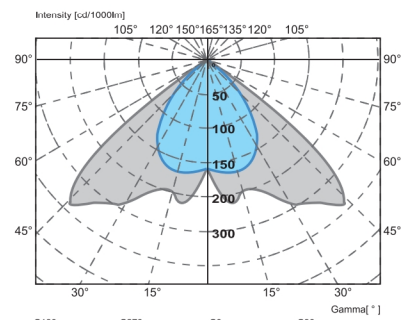

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Louvre	High quality specular anodized aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent PLL lamp of 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 236 PLL VDU	2x36W	600	-	600	-	135	-



Note : Subject to +/- 1.5mm


*SJ Lite reserves the right to change and amend the specification without prior notice.






SDA 140

Designed for direct mounted with asymmetrical mirror. High performance slim type luminaires. Inprocess interior ambience. An attractive appearance is enhanced with rounded edges body surround. Suitable for use especially recommended for blackboard lighting in schools, lighting of shelves on retail shop, showroom and storage facilities.



TM5 Utilization Factors

Utilization factors Room reflection			LOR =70.5%			DLOR =70.5%			ULOR =0.0%		
C	W	F	Room index								
			0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	45	52	56	60	64	68	70	72	74
	0.3		40	47	52	56	61	64	67	70	72
	0.1		37	43	48	52	57	61	64	68	70
0.5	0.5	0.2	44	50	55	58	62	65	67	70	71
	0.3		40	46	51	54	59	62	65	68	70
	0.1		36	43	48	51	56	60	62	66	68
0.3	0.5	0.2	43	49	53	56	60	63	65	67	69
	0.3		39	45	50	53	58	61	63	65	67
	0.1		36	43	47	51	55	59	61	64	66
0.0	0.0	0.0	35	41	45	49	53	56	56	61	63
			SHR NOM =1.25			SHR MAX =1.26			SHR MAX		
			TR =1.30								

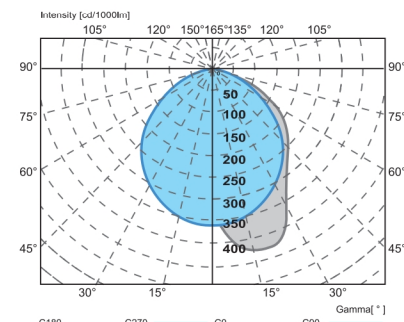

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Base : Made of heavy gauge sheet steel. Side : Extruded aluminium.
Reflector	High quality anodised aluminium in either specular, semi specular or matt finish.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 18W, 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional/ Components	Fused terminal block/Electronic ballast/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SDA 120	1x18W	683	-	191	-	65	-
SDA 140	1x36W	1293	-	292	-	65	-




Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.




SDM 140

Designed for direct surface mounted single parabolic with mirror optic louvre with christmas cross blades and prismatic diffuser. High performance slim type luminaires. Inprocess interior ambience. An attractive appearances is enhanced with rounded edges body surround. Mounting holes and knock out holes are provided for either surface mounting or suspension with rods. Suitable for use in modern interiors such as hotels, schools, goverment buildings, shopping complexes, offices, hospitals, condominiums and etc.



TM5 Utilization Factors

Utilization factors Room reflection			LOR =64.8%			DLOR =64.8%			ULOR =0.0%		
C	W	F	Room index								
0.7	0.5	0.2	0.75	1	1.25	1.5	2	2.5	3	4	5
	0.3		43	48	53	56	60	63	65	67	69
	0.1		39	44	49	52	57	60	62	65	67
0.5	0.5	0.2	35	41	46	49	54	57	60	63	65
	0.3		42	47	51	54	58	61	62	65	66
	0.1		38	43	48	51	55	58	60	63	64
0.3	0.5	0.2	35	40	45	48	53	56	58	61	63
	0.3		41	46	50	53	56	59	60	62	64
	0.1		38	43	47	50	54	57	58	61	62
0.0	0.0	0.0	35	40	44	48	52	55	57	59	61
			34	38	43	46	50	52	54	57	58
			SHR NOM =1.50			SHR MAX =1.60			SHR MAX		
			TR =1.72								

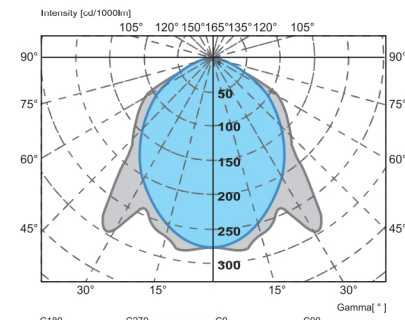

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Base : Made of heavy gauge sheet steel. Side : Extruded aluminium.
Reflector	High quality anodised aluminium in either specular, semi specular or matt finish.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 18W, 36W/ PL-C 10W, 13W, 18W/ PL-S 7W, 9W, 11W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional/ Components	Fused terminal block/Electronic ballast/Emergency pack.


Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SDM 120	1x18W	683	-	191	-	65	-
SDM 220	2x18W	683	-	292	-	65	-
SDM 320	3x18W	683	-	292	-	65	-
SDM 140 (1x4)	1x36W	1293	-	292	-	65	-
SDM 240 (1x4)	2x36W	1293	-	292	-	65	-
SDM 340 (1x4)	3x36W	1293	-	292	-	65	-
SDM 211 (PLS 1x1)	2x7/9/11W	292	-	292	-	65	-
SDM 218 (PLC 1x1)	2x10/13/18W	292	-	292	-	65	-




Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

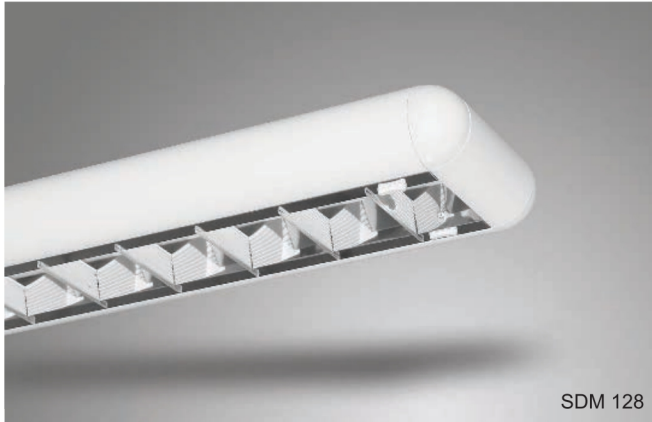


SDM 128

Designed for direct surface mounted single parabolic with mirror optic louvre with christmas cross blades and prismatic diffuser. High performance slim type luminaires. Inprocess interior ambience. An attractive appearances is enhanced with rounded edges body surround. Mounting holes and knock out holes are provided for either surface mounting or suspension with rods. Suitable for use in modern interiors such as hotels, schools, goverment buildings, shopping complexes, offices, hospitals, condominiums and etc.



TM5 Utilization Factors

Utilization factors Room reflection			LOR =73.3%			DLOR =73.3%			ULOR =0.0%		
C	W	F	Room index								
0.7	0.5	0.2	0.75	1	1.25	1.5	2	2.5	3	4	5
	0.3		N.A.	58	62	65	70	72	74	77	78
	0.1		N.A.	53	58	62	66	69	72	75	76
	0.5	0.2	N.A.	50	55	59	64	67	69	73	75
	0.3		N.A.	56	61	64	68	70	72	74	75
	0.1		N.A.	53	57	60	65	68	69	72	74
0.3	0.5	0.2	N.A.	50	54	58	62	65	67	70	72
	0.3		N.A.	55	59	62	66	68	69	71	73
	0.1		N.A.	52	56	59	63	66	67	70	71
0.0	0.0	0.0	N.A.	49	54	57	61	64	66	69	70
			N.A.	48	52	55	59	61	63	65	67
			SHR NOM =1.75			SHR MAX =1.91			SHR MAX		
			TR =2.21								

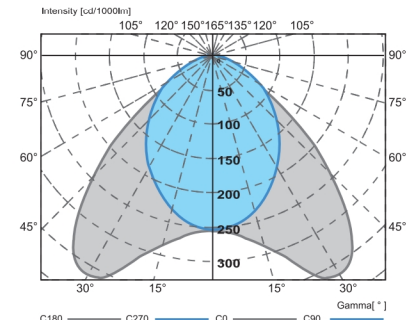

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Base : Made of heavy gauge sheet steel. Side : Extruded aluminium.
Reflector	High quality anodised aluminium in either specular, semi specular or matt finish.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamp of 14W/24W, 28W/54W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional/ Components	Fused terminal block/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SDM 128	1x28W/54W	1241	-	191/292	-	65	-
SDM 228	2x28W/54W	1241	-	191/292	-	65	-
SDM 114	1x14W/24W	640	-	191/292	-	65	-
SDM 214	2x14W/24w	640	-	191/292	-	65	-




Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.




SAC 128/S ASY

Designed for surface mounting with asymmetrical mirror. End to end continuously mounting with connection of a bracket to form a straight line position. Suitable for use in modern interiors such as hotels, schools, government buildings, shopping complexes, offices, hospitals, condominiums and etc.



TM5 Utilization Factors

Utilization factors			LOR =55.5%			DLOR =55.5%		ULOR =0.0%			
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	39	43	46	50	52	54	56	58
	0.3		N.A.	35	39	42	47	49	52	54	56
	0.1		N.A.	32	36	39	44	47	49	52	55
0.5	0.5	0.2	N.A.	38	42	44	48	50	52	54	56
	0.3		N.A.	34	38	41	45	48	50	53	54
	0.1		N.A.	32	36	39	43	46	48	51	53
0.3	0.5	0.2	N.A.	37	40	43	46	49	49	52	53
	0.3		N.A.	34	38	40	44	47	47	51	52
	0.1		N.A.	31	35	38	42	45	45	50	51
0.0	0.0	0.0	N.A.	30	34	37	40	43	45	47	49
			SHR NOM =1.75			SHR MAX =1.82		SHR MAX			
			TR =2.25								

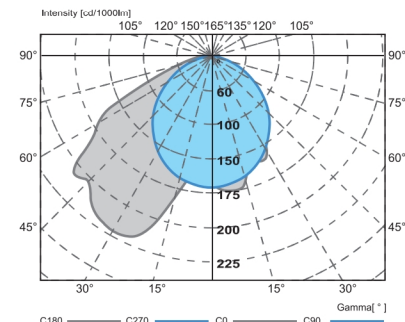

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
Reflector	High quality anodised aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamp of 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional components	High frequency electronic ballast/Fused terminal block/Emergency packs
	Radio interference suppressors.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 128/S ASY	1X28W	1195	-	190	-	80	-
SAC 228/S ASY	2X28W	1195	-	190	-	80	-




Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.




SSG114

Designed for direct mounting to ceiling. A Low energy luminaire with symmetric reflector for effective wall washing in retail areas, display areas and corridors. Creates a soft lighting effect.

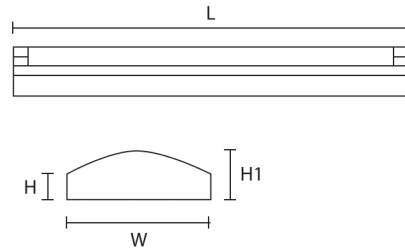

TM5 Utilization Factors

Utilization factors Room reflection			LOR =83.2% DLOR =83.2% ULOR =0.0%									
C	W	F	Room index									
0.7	0.5	0.2	0.75	1	1.25	1.5	2	2.5	3	4	5	
	0.3		47	54	60	65	71	76	79	83	85	
	0.1		40	47	54	59	66	71	74	79	82	
0.5	0.5	0.2	36	42	49	54	61	66	70	76	79	
	0.3		46	52	58	63	69	73	75	79	82	
	0.1		40	46	53	57	64	68	72	76	79	
0.3	0.5	0.2	35	42	48	53	60	65	69	73	77	
	0.3		44	51	56	61	66	70	73	76	78	
	0.1		39	45	52	56	62	66	70	74	76	
0.0	0.0	0.0	35	41	48	52	59	63	67	71	74	
			33	39	45	50	56	60	63	68	70	
			SHR NOM =1.50 SHR MAX =1.60 SHR MAX TR =1.79									

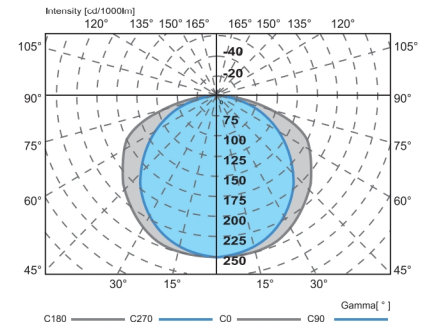

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 14W and 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder/ Starterholder	Moulded from Polycarbonate Material.

Dimensions


MODE NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SSG 114	1x14W	612	-	180	-	36	60
SSG 128	1x28W	1207	-	180	-	36	60




Note : Subject to +/- 1.5mm

*Specification subject to changes without prior notice.





Utilization factors			LOR =60.2%			DLOR =59.8%			ULOR =0.4%		
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	40	44	47	52	55	57	60	62
	0.3		N.A.	35	40	43	48	52	54	57	60
	0.1		N.A.	31	36	40	45	49	51	55	58
0.5	0.5	0.2	N.A.	38	43	46	50	53	55	58	59
	0.3		N.A.	34	39	42	47	50	52	55	57
	0.1		N.A.	31	35	39	44	48	50	54	56
0.3	0.5	0.2	N.A.	37	41	44	48	51	53	55	57
	0.3		N.A.	33	38	41	46	48	51	54	55
	0.1		N.A.	31	35	38	43	46	49	52	54
0.0	0.0	0.0	N.A.	29	33	37	41	44	46	49	51
			SHR NOM =1.75			SHR MAX =1.92			SHR MAX TR =2.36		

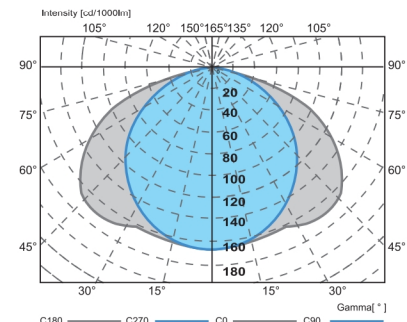

Technical Data

Body	Made of heavy gauge sheet steel.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5- 14W, 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional Components	Fused terminal block/Emergency pack.

[illegible]

*SJ Lite reserves the right to change and amend the specification without prior notice.

