


S-Flo A Series

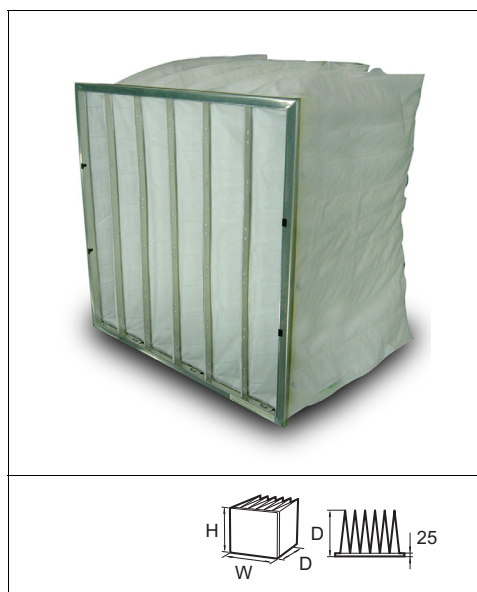

Advantages

- Multi-pocket bag filter
- Comprehensive range of standard sizes
- Robust metal header frame
- Unique pocket design
- Available in a range of efficiencies

Application: Comfort air conditioning applications, prefilter applications.

Type: Multi pocket bag filter.

Case: Galvanised steel.

Media: Synthetic Fibres.

EN 779:2002 filter class: F5, F6, F7, F8.

ASHRAE 52.2:1999 filter class: MERV 10, MERV 11, MERV 13, MERV 14.

Recommended final pressure drop: 450 Pa (suggested economical change point 250 Pa).

Temperature: 70°C maximum in continuous service.

Holding frames: Front and side access housings and frames are available, Type 8 and FC Housings.

Fire rating: UL 900 Class 2.

Reference	Model	Dimensions (WxHxD) mm	Filter classification EN 779:2002	Number of pockets	Media area m ²	Air flow / pressure drop m ³ /hr/Pa	Unitweight kg	Unit volume m ³
3300073	A5	592 x 592 x 600	F5	6	4.5	3400/60	2.4	0.05
3300074	B5	490 x 592 x 600	F5	5	3.6	2700/60	2	0.05
3300075	C5	287 x 592 x 600	F5	3	2.3	1700/60	1.5	0.03
3300017	A6	592 x 592 x 600	F6	6	4.5	3400/90	2.4	0.05
3300018	B6	490 x 592 x 600	F6	5	3.6	2800/90	2	0.05
3300019	C6	287 x 592 x 600	F6	3	2.3	1700/90	1.5	0.03
3300041	A7	592 x 592 x 600	F7	6	4.5	3400/110	2.4	0.05
3300042	B7	490 x 592 x 600	F7	5	3.6	2800/110	2	0.05
3300043	C7	287 x 592 x 600	F7	3	2.3	1700/110	1.5	0.05
3300065	A8	592 x 592 x 600	F8	6	4.7	3400/135	2.4	0.05
3300066	B8	490 x 592 x 600	F8	5	3.6	2800/135	2	0.05
3300067	C8	287 x 592 x 600	F8	3	2.3	1700/135	1.5	0.03

* 20mm header frame is available on request.