


# VariCel® V HT

*High Temperature Minipleat Filter for the Automotive Industry*


- Designed for recirculation systems in drying lines
- High temperature operation
- Robust, heat resistant materials
- Classification ranges F6 and F8 acc. to EN779
- Silicon free construction

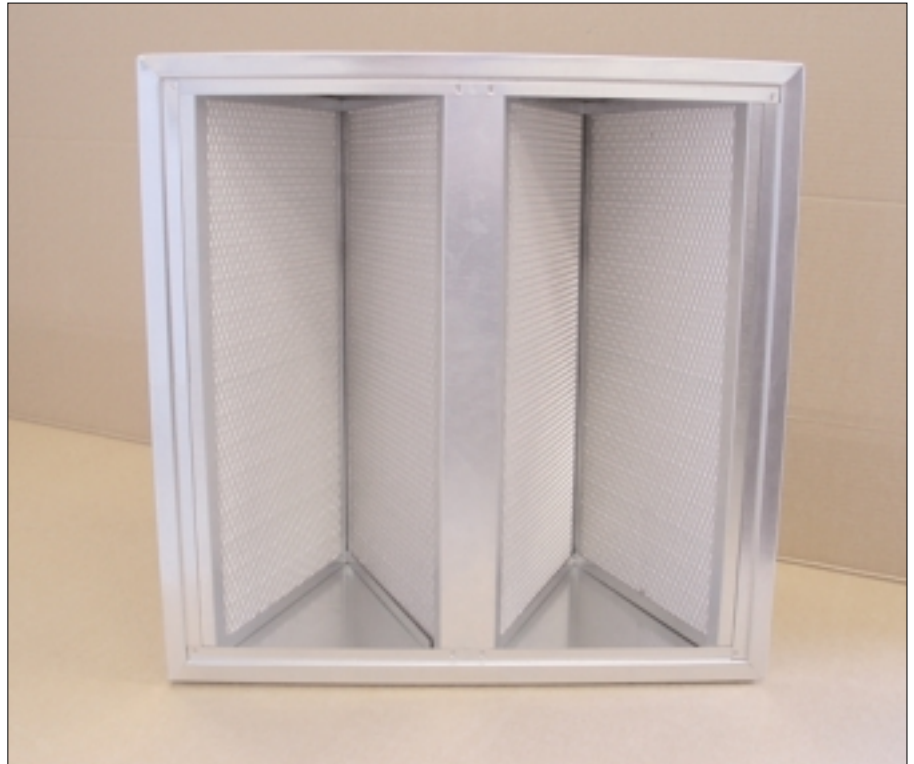

VariCel V HT is designed for use in the recirculation systems of drying ovens. Made of sturdy materials this filter has a maximum continuous operating temperature of 260°C and a peak temperature of 385°C (1 hour). Aluminized steel is used because it does not spall or flake at elevated temperatures. To ensure an high integrity construction, headers and cell sides are mechanically interlocked. The filter is silicon free: no adhesives, sealants or glues are used which could degrade at high temperatures, causing structural damage to the filter or affecting the quality of the drying process. Filter strength is further enhanced by faceguards and support bars on the air entering and leaving sides. The filter is available in the classification ranges F6 and F8 in accordance with EN779.



## Specifications

<b>Media</b>	Water repellent, fire - retardant high efficiency glass fiber
<b>Header and cell sides</b>	Aluminized steel with provisions for gasket application on both sides
<b>Separators</b>	Glass media ribbon.
<b>Gasket</b>	Glass rope on either the air leaving or air entering side
<b>Faceguards</b>	Aluminized steel
<b>Support bars</b>	Aluminized steel



# VariCel® V HT

## Installation example

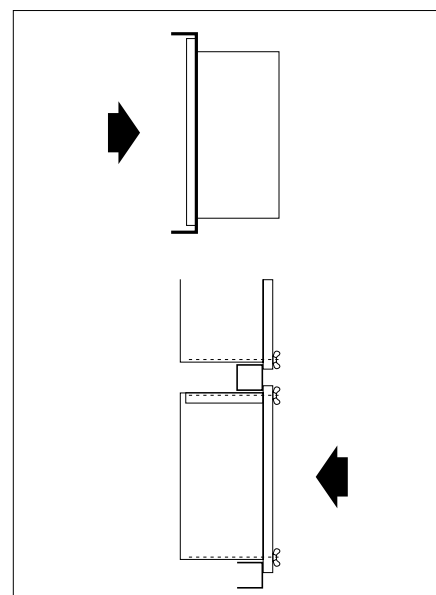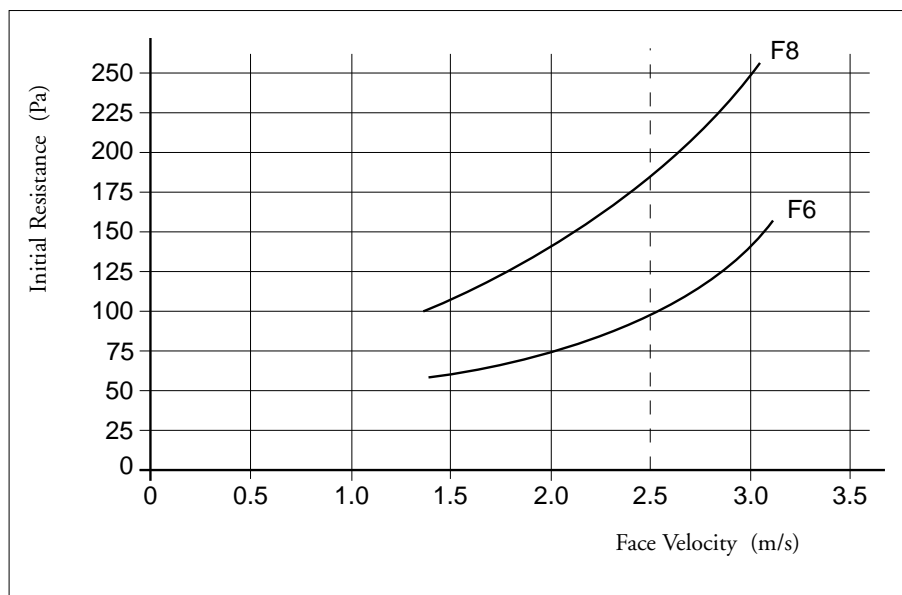

## Technical Data

Size <sup>1)</sup>  mm  WxHxD	Airflow capacity <sup>2)</sup>  Nm³/h Nm³/s	Initial Resistance  Pa	Recommended Final Resistance <sup>4)</sup>  Pa	Filter Surface Area  m²
60 % Average Efficiency F6 acc. to EN779				
588 x 588 x 292	3400 0.94	95	450	9.6
90 % Average Efficiency F8 acc. to EN779				
588 x 588 x 292	3400 0.94	180	450	9.6

### Notes:

- 1) VariCel V HT filters should always be installed with the separators in a vertical position.
- 2) Airflow capacity based on condition - 20°C, Sea level - 1 Bar.  
The airflow capacity is 100%. Filter can operate upto 25% above the suggested airflow capacity.
- 3) VariCel V HT filters cannot operate in conditions that exceed a final resistance of 450 Pa.

**AAF-International B.V.**  
**P.O. Box 7928**  
**1008 AC Amsterdam**  
**The Netherlands**  
**Tel.: + 31 20 549 44 11**  
**Fax: + 31 20 644 43 98**

### International AAF Offices:

Vienna (A), Montreal (CDN), Dortmund (D),  
 Vitoria (E), Paris (F), Cramlington (GB),  
 Athens (GR), Milan (I), Riyadh (KSA),  
 Mexico (Mex), Amsterdam (NL), Singapore,  
 Istanbul (TR), Louisville, Ky (USA)

### AAF Agents:

Copenhagen (DK), Bangalore (IND)  
 Oslo (N), Lisbon (P), Johannesburg (RSA),  
 Dalsjöfors (S), Malmö (S), Helsinki (SF)



AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice